

ProDVX Lightbox

Still images and moving video, the perfect combination

ProDVX Lightbox - The instore media system

Advertising, Communications and Information System

With dialogue and information at center stage, your message will always be crystal clear. This principle lies at the heart of our ProDVX LightBox system. Light up what you're communicating with a low-voltage display.

A Bright Concept

The LightBox Viewer consists of a screen suspended in a wire hanging system or a low-voltage track. We've integrated slim LCD backlights into the frame that lights up the screen. Simply, insert your advertising transparencies and get them noticed.

Moving Pictures

Our LightBox LCD display, available in 17" and 26", with integrated Solid State Video player transforms your advertising into film or a slide show with audio back-up. Data is fed into the LightBox LCD display via a compact flash card.

Endless Possibilities

Three LightBox Viewers in the wire/ROD hanging system, in a floor stand, four in the track, LightBox Viewers and LightBox LCD displays fitted in one frame, LightBox Viewers on the wall and on the ceiling ...one system and endless possibilities. Our flexible fixture methods guarantee that you can arrange your information perfectly in tune with the layout of your building. The ProDVX LightBox system is designed to play content landscape or portrait.




ProDVX Lightbox

Still images and moving video,
 the perfect combination

Flexibility

Flexibility is the keyword. You can fit the system anywhere and film or transparencies are simple and easy to insert.

Also available in network version!

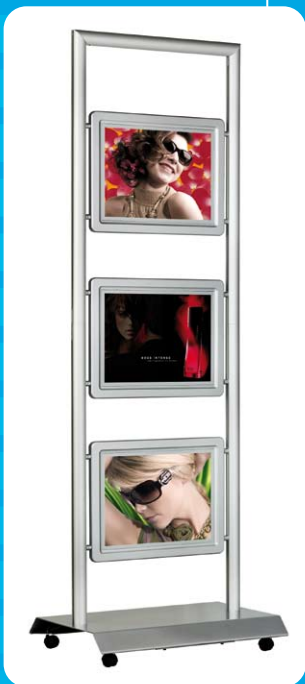

Model	LB117W	LB126W
Panel Size (inch)	17"	26"
Aspect Ratio	16:9	16:9
Pixel Pitch	0.289 x 0.289	0.422 x 0.422
Resolution	1280 x 768	1366 x 768
Color	16.2M	16.7M
Contrast	800:1	1200:1
Brightness	450	450
Response Time (Tr / Tf)	15 / 20 ms	5 / 8 ms
View Angle (H / V)	170° / 170°	176° / 176°
Video System	NTSC / PAL	NTSC / PAL
Speaker	2W x 2	5W x 2
Power Consumption	DC12V 60W	DC 24V 120W
Power Input selection I	DC12V 5A	DC24V 5A
Power Input selection II	DC13.8V Rope & Rod system	DC24V Rope & Rod system
USB 2.0 interface & USB 2.0 OTG Input	Mini USB & USB Type A	Mini USB & USB Type A
Video Input	Composite (3.5 φ Phone jack)	VGA & Composite (3.5 φ Phone jack)
Video Output	Composite (3.5 φ Phone jack)	-
Audio Output	Composite (3.5 φ Phone jack)	-
Storage Device(s)	CF Type I/II & 2.5" HDD (optional)	CF Type I/II & 2.5" HDD (optional)
Remote Control	YES	YES
OSD	YES	YES
Function Keys	-	-
Panel Protection	Tempered glass with black border	Tempered glass with black border
Housing	Silver plastic frame	Silver plastic frame
Mounting Solution (Landscape / Portrait)	VESA 75/100mm & Mounting Kit	VESA 100/200mm & Mounting Kit
CF Security (alarm)	YES	YES
Operating Temperature	0° ~ 35°	0° ~ 35°
Storage Temperature	0° ~ 60°	0° ~ 60°
Operating Humidity	20% ~ 80%	20% ~ 80%
Storage Humidity	5% ~ 90%	5% ~ 90%
Dimension (W x H x D) mm	520 x 400 x 56.2	774 x 520 x 90
Net Weight (Kg)	6	13