


## ProDVX Monitors

The ultimate support for your Point of Purchase campaign!



### M-Series:

Black metal LCD monitors integrated with a Solid State Video player.

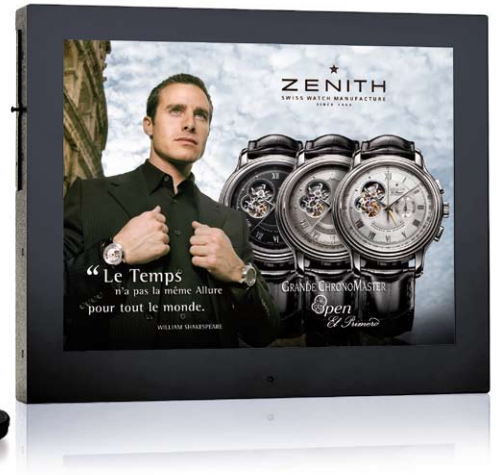

These smart monitors deliver the right message to your potential customer, at the right moment, using the best possible medium. Solid State means no moving parts. Interactive advertising is the future

of Instore merchandising and the future is here! The ProDVX Monitors are compact, simple and easy to use. These complete systems get your message to the customer with style, creating a long lasting impression.

Model	M110	M115	M117	M120	M132
Panel Size (inch)	10.4"	15"	17"	20"	31.5"
Aspect Ratio	4:3	4:3	16:9	4:3	16:9
Pixel Pitch	0.330 x 0.330	0.297 x 0.297	0.289 x 0.289	0.51 x 0.51	0.170 x 0.510
Resolution	640 x 480	1024 x 768	1280 x 768	800 x 600	1366 x 768
Color	262K	16.2M	16.2M	16.7M	16.7M
Contrast	300:1	450:1	800:1	500:1	1500:1
Brightness (cd/m2)	350	450	450	450	500
Response Time (Tr / Tf)	20 / 40 ms	4 / 12 ms	15 / 20 ms	11 / 5 ms	6.5 / 6.5 ms
View Angle (H / V)	140° / 110°	140° / 120°	170° / 170°	160° / 120°	168° / 168°
Video System	NTSC / PAL	NTSC / PAL	NTSC / PAL	NTSC / PAL	NTSC / PAL
Speaker	2W x 2	3W x 2	3W x 2	3W x 2	5W x 2
Power Consumption	40W	50W	60W	60W	AC
USB 2.0 interface & USB 2.0 OTG Input	-	Mini USB & USB Type A	Mini USB & USB Type A	Mini USB & USB Type A	Mini USB & USB Type A
Input	-	A/V	A/V	A/V	S-Video, A/V, VGA
Audio Output	Line Out	Line Out	Line Out	Line Out	-
Storage Device(s) CF Type I/II	CF Type I/II	CF Type I/II 2.5" HDD (optional)	CF Type I/II 2.5" HDD (optional)	CF Type I/II 2.5" HDD (optional)	CF Type I/II 2.5" HDD (optional)
Remote Control	YES	YES	YES	YES	YES
Power Supply	DC12V 3A	DC12V 4.16A	DC12V 6.6A	DC12V 6.6A	AC
OSD	YES	YES	YES	YES	YES
Function Keys	YES	YES	YES	YES	-
Motion Sensor	-	-	-	-	-
Panel Protection	AR tempered glass	AR tempered glass	AR tempered glass	AR tempered glass	AR tempered glass
Housing	Black metal case	Black metal case	Black metal case	Black metal case	Black metal case
Mounting Solution	VESA 75 mm	VESA 75/100 mm	VESA 75/100 mm	VESA 75/100 mm	VESA 100/200 mm
Operating Temperature	0° ~ 35°	0° ~ 35°	0° ~ 35°	0° ~ 35°	0° ~ 35°
Storage Temperature	0° ~ 60°	0° ~ 60°	0° ~ 60°	0° ~ 60°	0° ~ 60°
Operating Humidity	20% ~ 80%	20% ~ 80%	20% ~ 80%	20% ~ 80%	20% ~ 80%
Storage Humidity	5% ~ 90%	5% ~ 90%	5% ~ 90%	5% ~ 90%	5% ~ 90%
Dimension (WxHxD) mm	266 x 213 x 52.4	361 x 293.2 x 51.6	408.5 x 283.6 x 50.7	480 x 383 x 57.6	797.5 x 487 x 84.4
Net Weight (Kg)	3	6.5	7	12	20

## ProDVX Monitors

The ultimate support for your Point of Purchase campaign!

### MS-Series

Silver LCD monitors integrated with a Solid State Video player and PIR sensor (for audio).

These smart monitors deliver the right message to your potential customer, at the right moment, using the best possible medium. Solid State means no moving parts. Interactive advertising is the future of Instore merchandising and the future is here! The ProDVX Monitors are compact, simple and easy to use. These complete systems get your message to the customer with style, creating a long lasting impression.



Model	M107S/II	M110S/II
Backlight	LED	LED
Screen Size	7" Wide	10.2" Wide
Resolution	480x234	800 x 480
Viewing Angle (up/down)	40° / 60°	60° / 60°
Viewing Angle (left/right)	60° / 60°	60° / 60°
Brightness	250 cd/m2	200 cd/m2
Card Supported	CF & SD For video decoding application, please use CF card for better performance	CF & SD For video decoding application, please use CF card for better performance
Photo Supported	JPEG	JPEG
Video Decoding	MPEG I/II, MPEG-IV, M-JPEG, DAT, AVI	MPEG I/II, MPEG-IV, M-JPEG, DAT, AVI
Audio Decoding	MP3	MP3
Speaker	2W x 2	2W x 2
Auto-Play	MPEG or Auto Slide Show	MPEG or Auto Slide Show
USB OTG	Yes - From USB Disk to CF Card	Yes - From USB Disk to CF Card
Power Supply	100~240 VAC 50/60 Hz	100~240 VAC 50/60 Hz
Current Rating	2A from 12V DC adapter	2A from 12V DC adapter
Power Consumption	Max. 8.4W	Max. 15W
Auto Power On/Off	Yes	Yes
Timer setup	Yes	Yes
Dimension(L x W x H)	212 x 116 x 26 mm	254 x 172 x 28.5 mm
Weight	550g	850g
VESA Mount	75 x 75 mm	75 x 75 mm
Stand	Yes	Yes
PIR Sensor	Yes - Motion Sensor	Yes - Motion Sensor