



ViewStream™ 300 Interact

SD Media Player



The ViewStream™ 300 is a solid state device designed for the playback of MPEG-1, 2, & 4, JPEG files on video monitors in commercial environments. The files are stored and played directly from a solid state Compact Flash memory card.

- > MPEG 1, 2, 4 MPEG Stills and JPEG file formats
- > Content & Data Logs updated & retrieved automatically with USB stick
- > Easy-Synchronisation of multiple players via simple RS-232 connection

Content Format Supported

Video :	MPEG 4 (720 x 576, PAL) MPEG 4 (720 x 480, NTSC)
Still Picture :	JPEG (1280 x 720)
Audio :	44.1kHz Stereo, 224kbit/s
Codec	MPEG 2 (.mpg), MPEG 4 DivX (.avi) JPEG (.jpg)

Features

OSD Functions :	Set Date / Time / Set ID / Volume / Data Logging / OSD Display
IR Control	Display / 0-9 / Play / Stop / Repeat Pause / Volume / Track / Mute
Play Modes :	Playlist Mode Simple Play Mode Schedule Playback
USB Update :	Entire / Partial Update Auto Power Cycleing After USB Plug / Unplug
Interactivity :	Supports External Buttons Touch Screen Motion Sensor Barcode Scanner Serial Port Control

Specification


Playable Format :	.mpg / .jpg / .mp3 / .avi
Storage Media :	Compact Flash Card
Video Output :	Composite / S-Video / VGA / YPbPr
Audio Output :	Stereo Phone Jack (Line Out)
Playback Functions :	Play / Stop / Pause / Repeat / Previous Track / Next Track / Volume / Mute Loop Playback / Sequence Play Startup Mode / Sleep Mode
Touch Screen Functions :	Support Analog Touch Glass and ITO (Segment Type) Touch Glass
External I/O Ports :	RS-232 (9600, N-8-1) USB (Content Upload) Infra-Red (For IR handset) Remote Ext (For Button & Touch)
LED :	Power / Status LED (Green)
Watchdog :	Support System Reset
Real Time Clock :	Battery Backup RTC
Power Requirement :	DC 12v Input
Power Consumption :	500 mA @ 12v
Operating Temp :	0°C to 50°C
Relative Humidity :	5% - 95% Relative Humidity (Non-Condensing Condition)
Dimension (W x D x H) :	165.6mm x 107mm x 38mm
Weight (net) :	250g



ViewStream™ 300 Interact

SD Media Player

Technical Drawing :

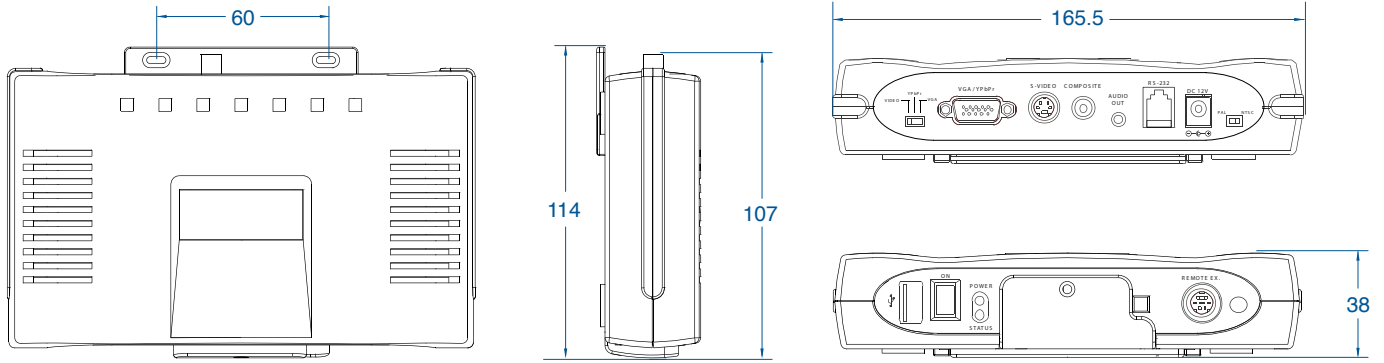

Dimensions (mm) : 165.5 x 107 x 38

Ordering Options

P/N 587160000-3	VS-300 Media Player
P/N 5590001-04-3	IR handset
P/N 4264514-01-3	Remote Ex. cable
P/N 4161013-00-3	8-button switchmount for Remote Ex.
P/N 4200006-00-3	Composite video cable, 6ft (RCA-Yellow)
P/N 4200014-00-3	Audio cable, phone plug to RCAs, 6ft (RCAs-Red/White)
P/N 4268943-00-3	RJ-11 to RS-232 Cable
P/N 4260048-00-3	VGA to YPbPr Cable

Available Documentation

- User Guide
- Content Creation Guide
- Firmware Upgrade Procedure
- DV Studio 2 Manual

DV-Studio 2

- > Playlist Creation
- > Scheduling
- > Managing Stills
- > Applying Triggers
- > Interactive Programs
- > RS-232 Control

<http://www.digitalview.com/products/dv-studio-software>

Easy Sync



www.youtube.com/digitalviewgroup

EUROPE

6 Marylebone Passage, London, W1W 8EX, UK
t : +44 (0) 20-7631-2150

ASIA

16th Floor Millennium City 3, 370 Kwun Tong Road, Kwun Tong, Hong Kong
t : (852) 2861-3615

USA

18440 Technology Drive, Morgan Hill, CA 95037, USA
t : +1 (408) 782-7773